

This information provided by:



Gross Automation
www.grossautomation.com

Call Toll Free:
800-349-5827

CATALOG NUMBER


M — **F** — **J**

- 3 = 3-WAY INNER DUCT
- 4 = 4-WAY INNER DUCT
- B = 124" (LAY LENGTH)
4' R = 0-90° MAX. BEND
- C = 190" (LAY LENGTH)
6' R = 0-90° MAX. BEND
- X = TYPE C OUTER DUCT
- F = TYPE 40 OUTER DUCT
- D = TYPE 80 OUTER DUCT

ODD COLORED INNERDUCT
DENOTED BY WHITE PAINT

PRODUCT SHIPPED INSIDE
RIGID STRAIGHT PIPE

INNERDUCTS ARE MADE OF HIGH
HEAT/ABRASION RESISTANT NYLON
FOR CABLE PULLING OR
CABLE JETTING APPLICATIONS

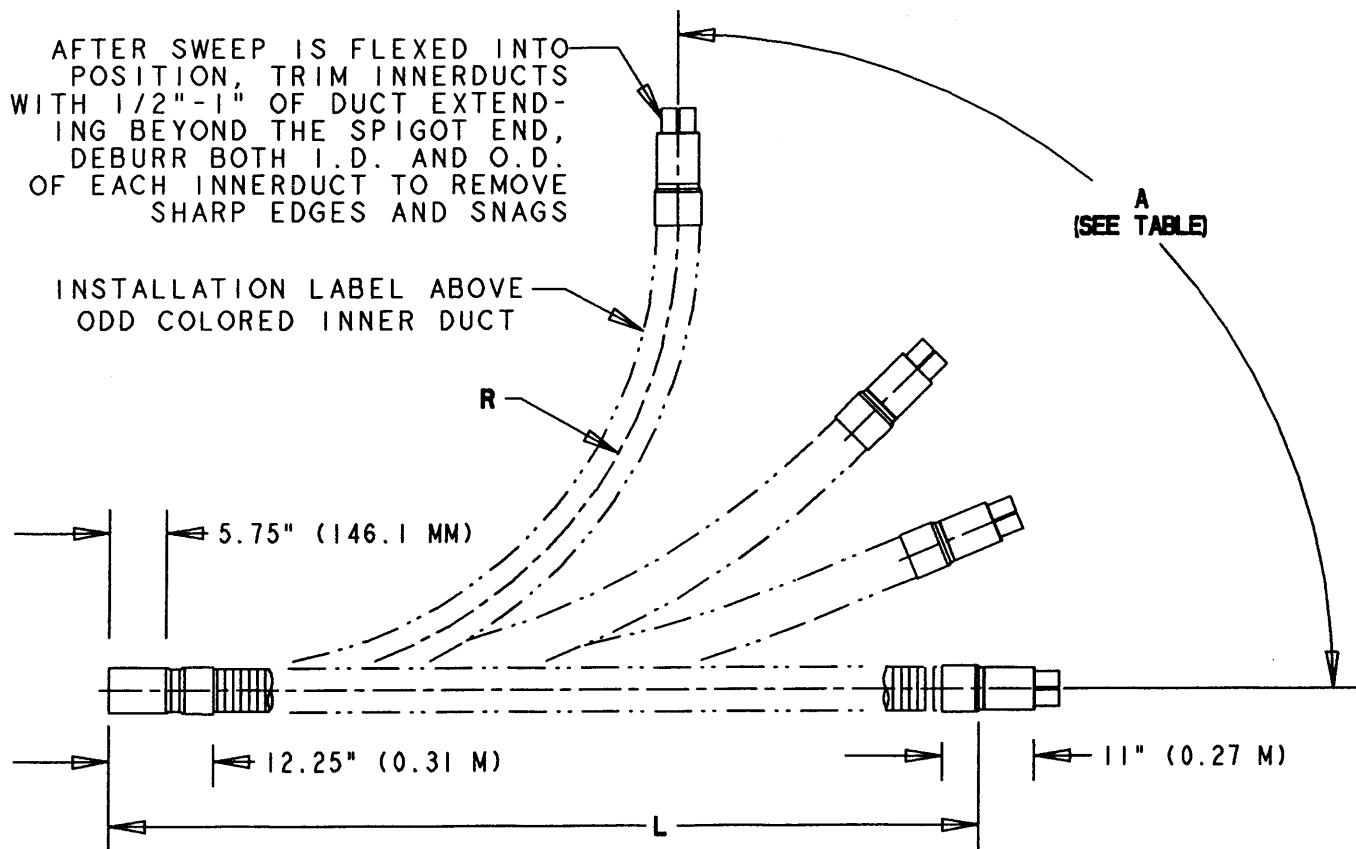

CAUTION: DO NOT BEND SWEEP TIGHTER THAN
SPECIFIED IN CHART.

			OVERALL LAY LENGTH (IN/METERS)
PART NUMBER	R	A	L
M_FB_J	4 FT	0-90°	124" (3.17 M)
M_FC_J	6 FT	0-90°	190" (4.86 M)

TITLE OUTLINE - MULTI-GARD FLEXIBLE BENDS

DRN. DATE
OWB 6-18-92

PART NO: SEE CHART

LAMSON & SESSIONS

ALL DRAWINGS ARE THE PROPERTY OF LAMSON &
SESSIONS AND SHALL NOT BE REPRODUCED IN ANY
FORM WITHOUT LAMSON & SESSIONS' APPROVAL AND
ARE TO BE PROMPTLY RETURNED UPON REQUEST.

APP. DATE
RDC

DRAWING NO: AC00795

REV.
F